




LED Marquee Display

# TextLine One

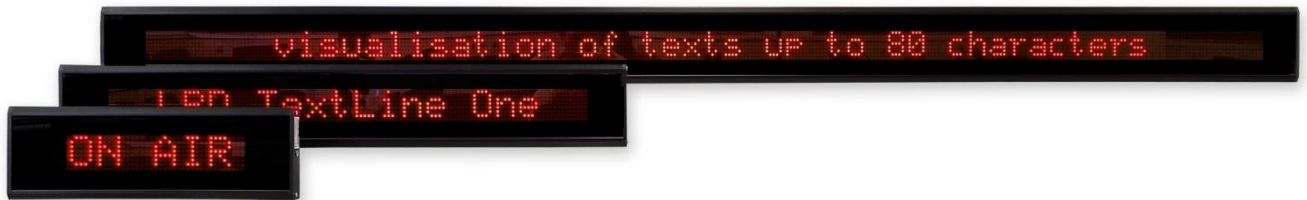

### **Innovative features**

The LED marquee displays of the TextLine One series are characterized by high contrast and brilliant shining LEDs. The product spectrum ranges from compact devices, six characters, to very large devices for static display of 80 characters and a length of almost four meters.

The devices have various display options: in addition to static text display, marquee and flashing are also possible.

An integrated text memory stores the displayed information, so that after a power interruption the same information as before is automatically displayed again.

The displays have an integrated clock for displaying date and time.

### **Ethernet and WLAN or USB**

The devices of the TextLine One series are available with Ethernet TCP/IP and WLAN as well as with USB interface.

### **Easy mounting**

A mounting kit for wall mounting is included. Optional mounting elements for pendant mounting of one or two displays are available.

In order that data and power cables can be connected to the display without being seen, special end caps are offered.

The devices have a separate power supply unit. They can also be equipped with an integrated power supply unit with a mains connection cable 3 x 0,75 mm<sup>2</sup>.

### **Made for continuous operation**

The high-quality LEDs allow a usage time of 24/7 (24 hours a day, 7 days a week) all year round.

## Technical data

| Type                     | TL105-06.0R-...   | TL105-13.0R-...   | TL105-20.0R-...    |
|--------------------------|-------------------|-------------------|--------------------|
| Number of characters     | 6                 | 13                | 20                 |
| Power consumption (max.) | approx. 10 W      | approx. 15 W      | approx. 20 W       |
| Dimensions               | 470 x 159 x 41 mm | 774 x 159 x 41 mm | 1078 x 159 x 41 mm |
| Weight                   | approx. 1,7 kg    | approx. 2,6 kg    | approx. 3,6 kg     |

| Type                     | TL105-40.0R-...    | TL105-60.0R-...    | TL105-80.0R-...    |
|--------------------------|--------------------|--------------------|--------------------|
| Number of characters     | 40                 | 60                 | 80                 |
| Power consumption (max.) | approx. 35 W       | approx. 50 W       | approx. 65 W       |
| Dimensions               | 1990 x 159 x 41 mm | 2902 x 159 x 41 mm | 3814 x 159 x 41 mm |
| Weight                   | approx. 6,5 kg     | approx. 9,3 kg     | approx. 12,2 kg    |

### General technical Data

|                       |  |
|-----------------------|--|
| Character height      | 50 mm  |
| Readability           | one-sided up to approx. 20 meters                    |
| Character set         | ASCII  |
| Character display     | static, marquee, flashing                            |
| Text memory           | 255 characters                                       |
| Housing               | Aluminum profile black, filter disk plastic          |
| Mounting              | Mounting kit for wall mounting with adjustable angle |
| Protection type       | IP20   |
| Operating temperature | 0...40 °C  |

### Optionen

|                                  |   |
|----------------------------------|---|
| TL105-xx.xx-xx-ETH               | Interface Ethernet TCP/IP and WLAN  |
| TL105-xx.xx-xx-USB               | Interface USB   |
| TL105-xx.xx-A0-xxx               | External power supply unit<br>Power supply 24 V DC, (100-240 V AC, 50-60 Hz via plug-in power supply) |
| TL105-xx.xx-B0-xxx <sup>1)</sup> | Power supply integrated with connection cable 3 x 0,75 mm <sup>2</sup> , power supply 100-240 V AC    |

### Zubehör

|                           |   |
|---------------------------|---|
| TL105-HM1-A <sup>1)</sup> | Mounting elements for pendant mounting (one display)                |
| TL105-HM2-A <sup>1)</sup> | Mounting elements for pendant mounting (two displays, back to back) |
| TL105-EK1-A               | Pair of end caps for cable cover                                    |

<sup>1)</sup> not available for TL105-60.0R-... and TL105-80.0R-...

## Where to buy

### GERMANY

Siebert Industrieelektronik GmbH  
Siebertstrasse  
D-66571 Eppelborn

Phone +49 6806 980-0  
Fax +49 6806 980-999  
info.de@siebert-group.com

### AUSTRIA

Siebert Österreich GmbH  
Simmeringer Hauptstrasse 24  
A-1110 Wien

Phone +43 1 74040153  
info.at@siebert-group.com

### SWITZERLAND

Siebert AG  
Bützbergstrasse 2  
CH-4912 Aarwangen

Phone +41 62 922 18 70  
Fax +41 62 922 33 37  
info.ch@siebert-group.com

### ITALY

Siebert Italia Srl  
Via Galileo Galilei 2/A  
I-39100 Bolzano (BZ)

Phone +39 0471 053 753  
Fax +39 0471 053 754  
info.it@siebert-group.com

### THE NETHERLANDS

Siebert Nederland B.V.  
Jadedreef 26  
NL-7828 BH Emmen

Phone +31 591 633 444  
Fax +31 591 633 125  
info.nl@siebert-group.com

### FRANCE

Siebert France Sarl  
4 rue de l'Abbé Louis Verdet  
F-57200 Sarreguemines

Phone +33 3 87 98 63 68  
Fax +33 3 87 98 63 94  
info.fr@siebert-group.com

For more information visit [www.lrd.de](http://www.lrd.de)